






SRL

OBLOANE DIN OTEL

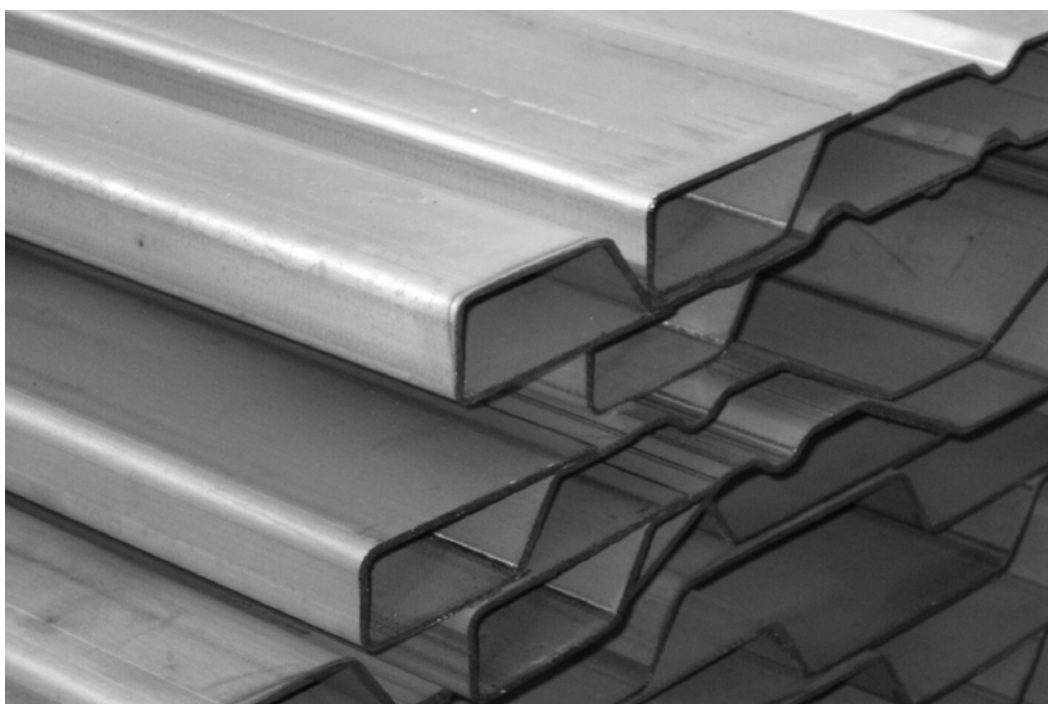

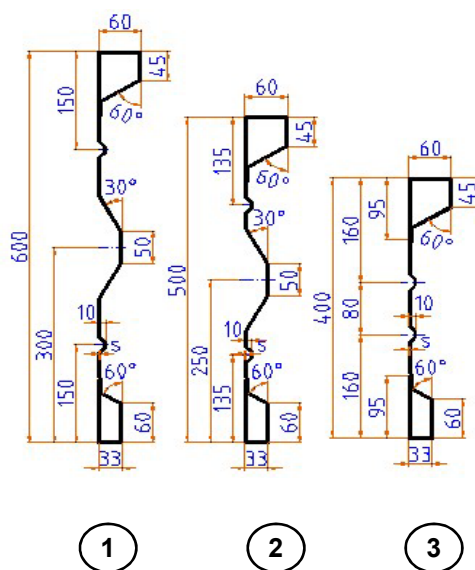

	COD	DENUMIRE	SUPRAFATA	Kg/m	Lung.de fir-m
1	13B60-018	Oblon otel cu perete de 2 mm	netratat	14,52	max. 6
	13B60-028	Oblon otel cu perete 2,5mm	netratat	18,16	max. 6
2	13B50-018	Oblon otel cu perete 2 mm	netratat	12,95	max. 6
	13B50-028	Oblon otel perete 2,5 mm	netratat	16,19	max. 6
3	13B40-018	Oblon otel perete 2 mm	netratat	11,23	max. 6
		MATERIAL: S235 - QSTE 500			

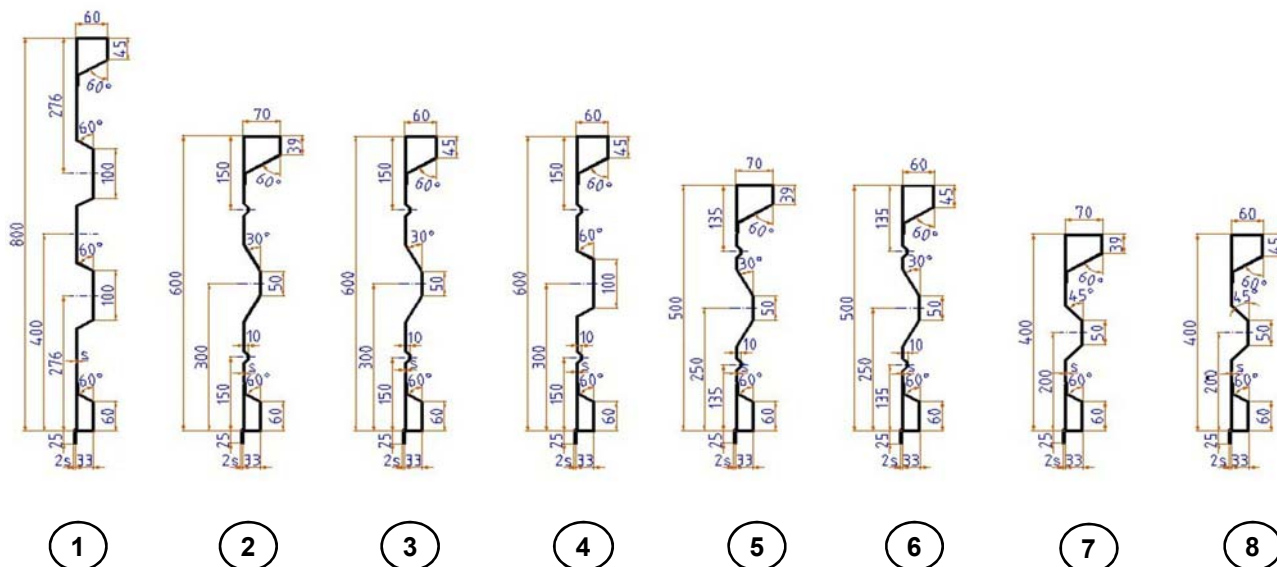

1

2

3

4


5

6

7



8

COD	DENUMIRE	SUPRAFATA	Kg/m	Lung.de fir-m	
1	13BAKTT8-018	Oblon otel perete de 2,5mm	netratat	23,6	max. 6
2	13BAKS60-018	Oblon otel perete 2 mm	netratat	15,39	max. 6
	13BAKS60-028	Oblon otel cu perete 2,5mm	netratat	19,24	max. 6
3	13BAK60-018	Oblon otel cu perete 2 mm	netratat	15,39	max. 6
	13BAK60-028	Oblon otel perete 2,5mm	netratat	19,24	max. 6
4	13BAKT60-018	Oblon otel perete 2,5 mm	netratat	19,23	max. 6
5	13BAKS50-018	Oblon otel perete de 2 mm	netratat	13,82	max. 6
6	13BAK50-018	Oblon otel perete 2 mm	netratat	13,82	max. 6
7	13BAKSkT4-18	Oblon otel perete 2 mm	netratat	12,33	max. 6
8	13BAKkT4-018	Oblon otel perete 2 mm	netratat	12,33	max. 6
MATERIAL:		S235 - QSTE 500			

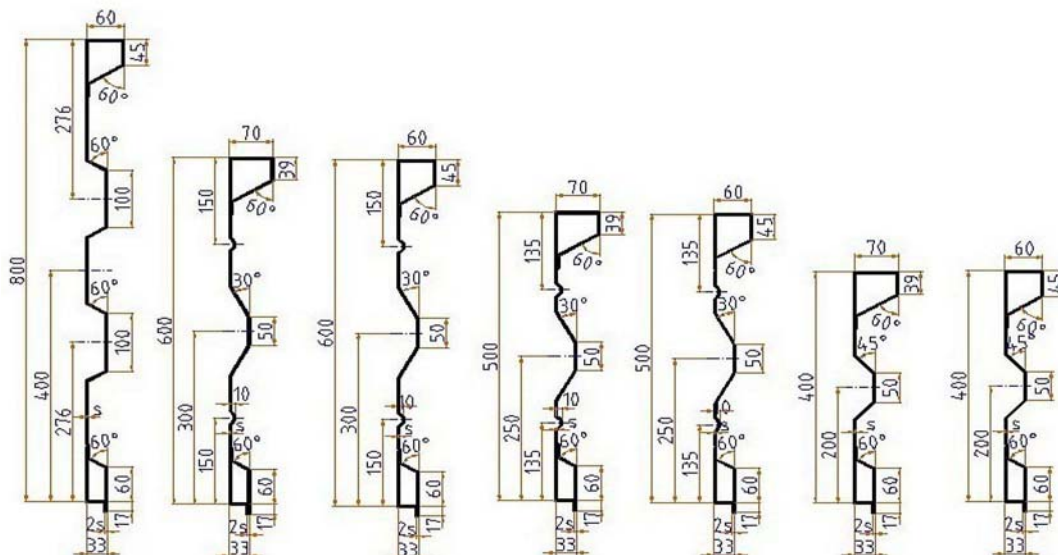


1
2
3
4
5
6
7


	COD	DENUMIRE	SUPRAFATA	Kg/m	Lung.de fir-m
1	13BNTT80-018	Oblon otel perete 2,5 mm	netratat	23,55	max. 6
2	13BNS60-018	Oblon otel perete 2 mm	netratat	15,14	max. 6
	13BNS60-028	Oblon otel perete 2,5 mm	netratat	18,93	max. 6
3	13BN60-018	Oblon otel perete 2,5 mm	netratat	18,93	max. 6
4	13BNS50-018	Oblon otel perete 2 mm	netratat	13,56	max. 6
5	13BN500-018	Oblon otel perete 2 mm	netratat	13,56	max. 6
6	13BNSkT4-018	Oblon otel perete 2 mm	netratat	12,08	max. 6
7	13BNkT40-018	Oblon otel perete 2 mm	netratat	12,08	max. 6
MATERIAL: S235 - QSTE 500					

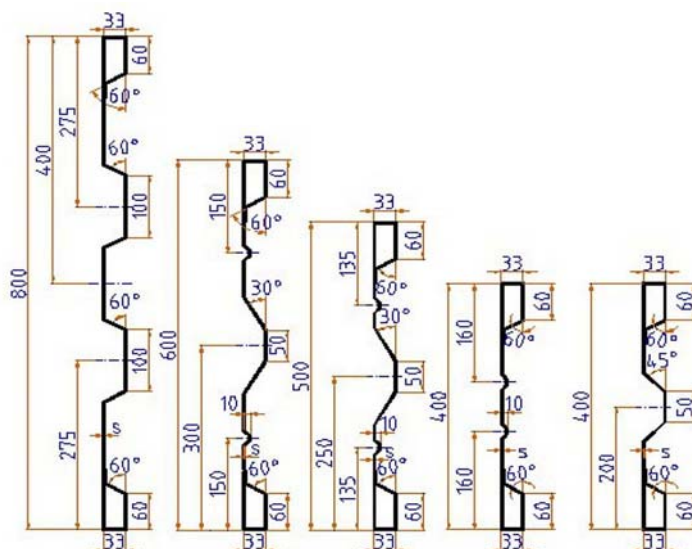

	COD	DENUMIRE	SUPRAFATA	Kg/m	Lung.de fir-m
1	13HVTT80-018	Oblon otel perete 2 mm	netratat	17,68	max. 6
2	13HV60-018	Oblon otel perete 1,5 mm	netratat	10,48	max. 6
	13HV60-028	Oblon otel perete 2 mm	netratat	13,97	max. 6
3	13HV50-018	Oblon otel perete 1,5 mm	netratat	9,31	max. 6
	13HV50-028	Oblon otel perete 2 mm	netratat	12,4	max. 6
4	13HV40-018	Oblon otel perete 1,25 mm	netratat	6,73	max. 6
	13HV40-028	Oblon otel perete 1,5 mm	netratat	8,01	max. 6
	13HV40-038	Oblon otel perete 2 mm	netratat	10,68	max. 6
5	13HVkT40-018	Oblon otel perete 2 mm	netratat	10,98	max. 6
MATERIAL:		S235 - QSTE 500			

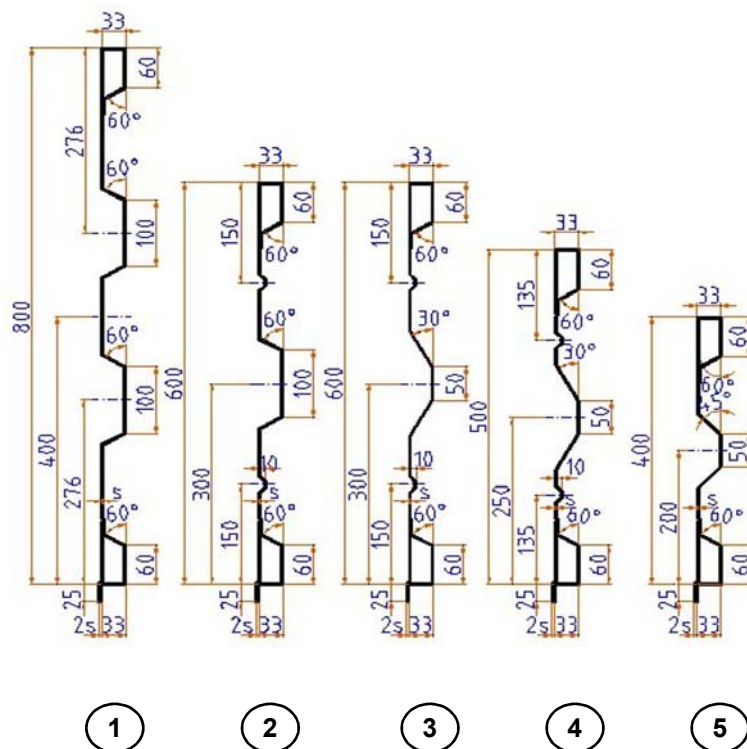

COD	DENUMIRE	SUPRAFATA	Kg/m	Lung.de fir-m	
1	13HVAKTT8-18	Oblon otel perete 2 mm	netratat	18,29	max. 6
2	13HVAKT6-018	Oblon otel perete 2mm	netratat	15,07	max. 6
3	13HVAK60-018	Oblon otel perete 2 mm	netratat	14,63	max. 6
4	13HVAK50-018	Oblon otel perete 2 mm	netratat	12,95	max. 6
5	13HVAKkT4-18	Oblon otel perete 2 mm	netratat	11,64	max. 6
MATERIAL:		S235 - QSTE 500			

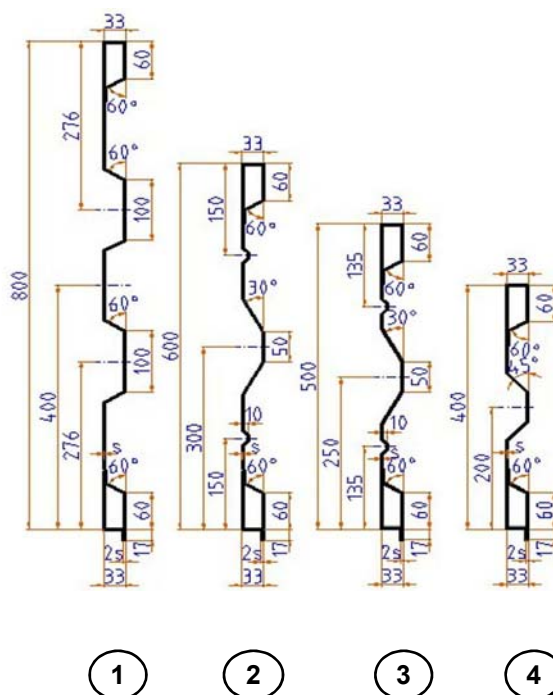


1

2


3

4

	COD	DENUMIRE	SUPRAFATA	Kg/m	Lung.de fir-m
1	13HVNTT8-018	Oblon otel perete 2 mm	netratat	18,14	max. 6
2	13HVN60-018	Oblon otel perete 2 mm	netratat	14,52	max. 6
3	13HVN50-018	Oblon otel perete 2 mm	netratat	12,95	max. 6
4	13HVnkT4-018	Oblon otel perete 2 mm	netratat	11,53	max. 6
MATERIAL:		S235 - QSTE 500			

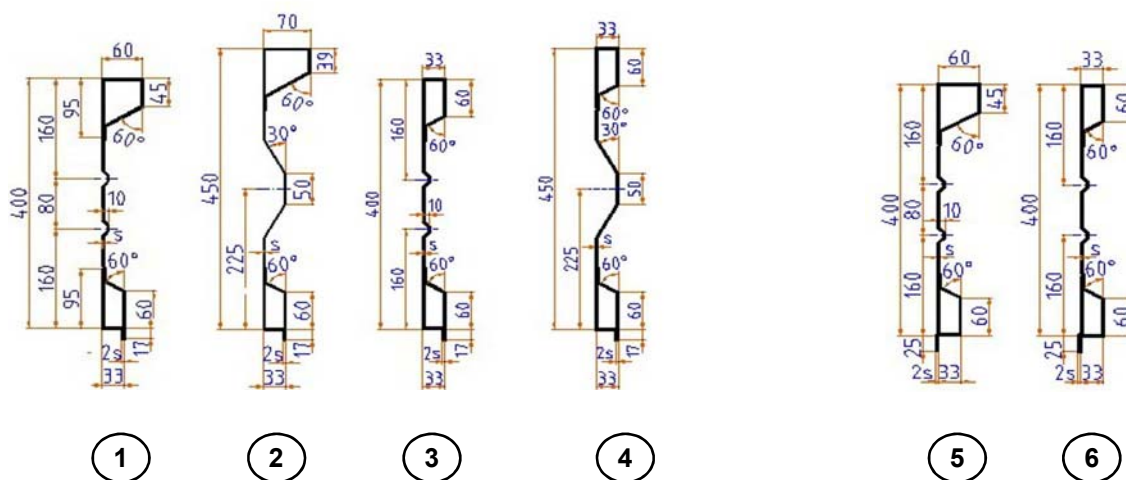

	COD	DENUMIRE	SUPRAFATA	Kg/m	Lung.de fir-m
1	13BN40-018	Oblon otel perete 2 mm	netratat	11,78	max. 6
2	13BNS45-018	Oblon otel perete 2,5 mm	netratat	15,88	max. 6
3	13HVN40-018	Oblon otel perete 2 mm	netratat	11,23	max. 6
4	13HVN45-018	Oblon otel perete 2 mm	netratat	12,16	max. 6
5	13BAK40-018	Oblon otel perete 2 mm	netratat	12,03	max. 6
6	13HVAK40-018	Oblon otel perete 2 mm	netratat	11,34	max. 6
MATERIAL:		S235 - QSTE 500			

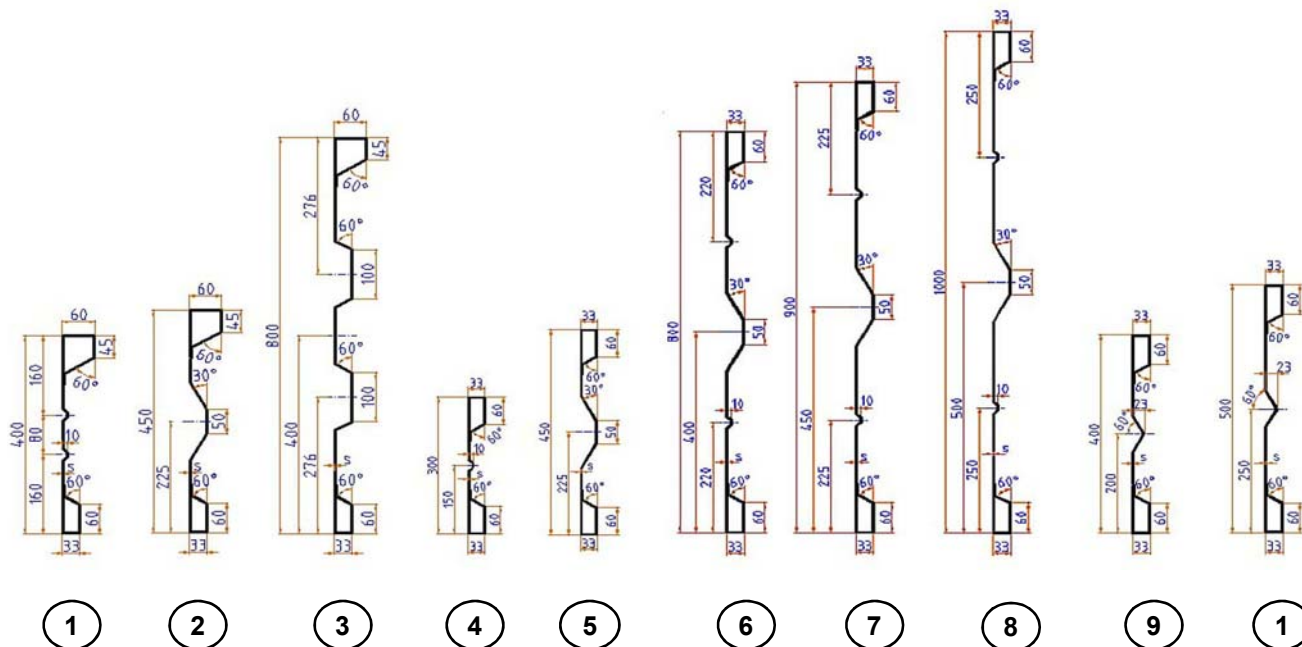

1

2

3

4

5

6

7

8

9

1

	COD	DENUMIRE	SUPRAFATA	Kg/m	Lung.de fir-m
1	13B40-018	Oblon otel perete 1,6 mm	netratat	8,96	max. 6
2	13B45-018	Oblon otel perete 2 mm	netratat	12,17	max. 6
3	13BTT80-018	Oblon otel perete 2,5 mm	netratat	23,16	max. 6
4	13HV30-180	Oblon otel perete 2 mm	netratat	9,11	max. 6
5	13HV45-018	Oblon otel perete 2 mm	netratat	11,16	max. 6
6	13HV80-018	Oblon otel perete 2 mm	netrata	17,11	max. 6
7	13HV90-018	Oblon otel perete 2 mm	netratat	18,68	max. 6
8	13HV100-018	Oblon otel perete 2 mm	netratat	20,25	max. 6
9	13HVD40-018	Oblon otel perete 2 mm	netratat	10,68	max. 6
1	13HVD50-018	Oblon otel perete 2 mm	netratat	12,3	max. 6

MATERIAL: S235 - QSTE 500